

FSP 1300/...-FME

End-Fed $\frac{1}{2} \lambda$ Dipole Antenna with Universal FME-Connection System for Portable Equipment in the 1300 MHz Band

DESCRIPTION

- Highly flexible polyethylene covered StraightFlex steel wire (self-straightening).
- Full size, end-fed $\frac{1}{2} \lambda$ antenna whip – groundplane independent.
- High gain and efficient decoupling from the portable equipment due to half-wave design.
- 5 dB gain (typ.) compared to a $\frac{1}{4} \lambda$ antenna whip on the same equipment.
- Highest quality materials in a slender and elegant design.
- Delivered factory tuned to customer specified frequency.
- Provided with universal FME-connection system for optimum flexibility and easily exchangeable connectors.
- Designed for use with the following of Procom's line of black FME-connectors (to be ordered separately): BFME-BNC, BFME-TNC, BFME-N, BFME-MUHF, BFME-EBNC, BFME-ETNC and BFME-EMUHF.




ORDERING DESIGNATIONS

TYPE	PRODUCT NO.
FSP 1300/...-FME	140000232


SPECIFICATIONS

ELECTRICAL	
MODEL	FSP 1300/...-FME
ANTENNA TYPE	End-fed $\frac{1}{2} \lambda$ antenna for portable equipment
FREQUENCY	1300 MHz band (1200 – 1300 MHz)
IMPEDANCE	Nom. 50 Ω
POLARIZATION	Vertical
GAIN	5 dB (compared to a $\frac{1}{4} \lambda$ portable antenna)
BANDWIDTH	≥ 70 MHz @ SWR ≤ 2.0
SWR	< 1.3 @ f. res.
MAX. POWER	25 W
MECHANICAL	
MATERIALS	Polyethylene covered flexible steel wire Black-chromed brass
COLOUR	Black
TOTAL HEIGHT	Approx. 150 mm
WEIGHT	Approx. 25 g
CONNECTOR	FME (female) (Exchangeable BFME-connectors to be ordered separately)

TYPICAL SWR CURVE

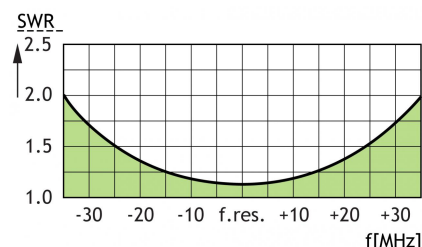

RECOMMENDED BFME-CONNECTORS

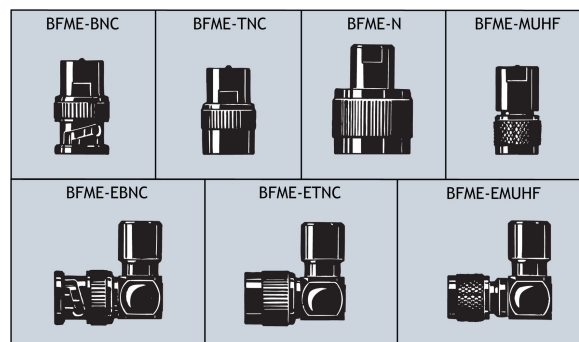

(To be ordered separately)



PROCOM France S.A.R.L. se réserve le droit d'améliorer les spécifications sans préavis.
27/07/12