

# GA 27 1/4-FME

Rubber Antenna with Universal FME-Connection System for Portable Equipment in the 27 MHz Band

## DESCRIPTION

- Sturdy, conical, flexible rubber antenna.
- Shortened  $\frac{1}{4} \lambda$  whip yields an acceptable mechanical length.
- Highest quality materials – designed for “wear and tear”.
- Delivered factory tuned and tested to ensure minimum SWR.
- and optimum performance.
- Provided with universal FME-connection system for optimum flexibility and easily exchangeable connectors.
- Designed for use with the following of Procoms line of black FME-connectors (to be ordered separately): BFME-UHF, BFME-BNC, BFME-TNC, and BFME-N.




## ORDERING DESIGNATIONS

| TYPE          | PRODUCT NO. |
|---------------|-------------|
| GA 27 1/4-FME | 140000042   |

## SPECIFICATIONS

| ELECTRICAL   |  |
|--------------|--|
| MODEL        | GA 27 1/4-FME  |
| ANTENNA TYPE | Shortened $\frac{1}{4} \lambda$ antenna for portable equipment       |
| FREQUENCY    | 27 MHz CB band   |
| IMPEDANCE    | Nom. 50 $\Omega$   |
| POLARIZATION | Vertical   |
| SWR          | < 2 when mounted directly on portable equipment                      |
| MAX. POWER   | 25 W   |
| MECHANICAL   |  |
| MATERIALS    | Steelwire moulded in thermoplastic rubber<br>Black-chromed brass     |
| COLOUR       | Black  |
| TOTAL HEIGHT | Approx. 500 mm   |
| WEIGHT       | Approx. 85 g   |
| CONNECTOR    | FME (female) (Exchangeable BFME-connectors to be ordered separately) |

## RECOMMENDED BFME-CONNECTORS

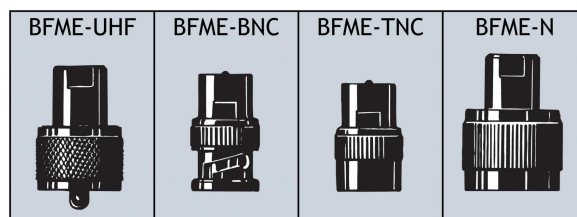

(To be ordered separately)

## PLEASE NOTE

The GA 27 1/4 is also available with different thread studs, but in this case with fixed, non-exchangeable connector (not FME-connection system). Information on these special versions on request.



PROCOM France S.A.R.L. se réserve le droit d'améliorer les spécifications sans préavis.  
16/05/12