

GA 70/...-IC-F61

Rubber Antenna for ICOM Portable Equipment in the 70 cm Band

DESCRIPTION

- Sturdy, conical, flexible rubber antenna.
- Full-size $\frac{1}{4} \lambda$ whip.
- Highest quality materials – designed for “wear and tear”.
- Delivered factory tuned and tested to ensure minimum SWR.
- Especially designed for ICOM IC-F61 (450 MHz band).




ORDERING DESIGNATIONS

TYPE NO.	PRODUCT NO.	FREQUENCY
GA 70/s-IC-F61	140000189	380 – 430 MHz
GA 70/l-IC-F61	140000193	400 – 450 MHz
GA 70/h-IC-F61	140000191	420 – 470 MHz

SPECIFICATIONS

ELECTRICAL	
MODEL	GA 70/...-IC-F61
ANTENNA TYPE	$\frac{1}{4} \lambda$ antenna for portable equipment
FREQUENCY	70 cm band covered by three models
IMPEDANCE	Nom. 50 Ω
POLARISATION	Vertical
GAIN	0 dB (equal to a $\frac{1}{4} \lambda$ portable antenna)
BANDWIDTH	≥ 60 MHz @ SWR ≤ 2.5
SWR	≤ 2 when mounted directly on portable equipment
MAX. POWER	100 W
MECHANICAL	
MATERIALS	Steelwire moulded in thermoplastic rubber Environment-proof plastics Black-chromed brass
COLOUR	Black
TOTAL HEIGHT	Approx. 140 mm (dep. on type)
WEIGHT	Approx. 30 g
CONNECTOR	SMA (male) special for IC-F61

TYPICAL SWR CURVE

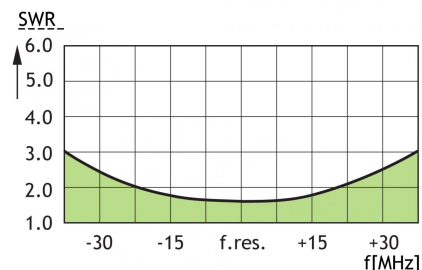

PROCOM France S.A.R.L. se réserve le droit
d'améliorer les spécifications sans préavis.
06/12/11