

SB 2/...-FME

Steel-Band Antenna with Universal FME-Connection System for Portable Equipment in the 2 m Band

DESCRIPTION

- Rugged, flexible steel-band antenna whip.
- Curved sectional area to help keeping the antenna erect.
- Full-size $\frac{1}{4} \lambda$ whip.
- Provided with toggle joint and wing screw for easy fold-down.
- Delivered factory tuned and tested to ensure minimum SWR and optimum performance.
- Provided with universal FME-connection system for optimum flexibility and easily exchangeable connectors.
- Designed for use with the following of Procoms line of black FME-connectors (to be ordered separately): BFME-UHF, BFME-BNC, BFME-TNC, BFME-N, BFME-EBNC and BFME-ETNC.




ORDERING DESIGNATIONS

TYPE	PRODUCT NO.	FREQUENCY
SB 2/l-FME	140000148	144 - 164 MHz
SB 2/h-FME	140000144	155 - 175 MHz

SPECIFICATIONS

ELECTRICAL	
MODEL	SB 2/...-FME
ANTENNA TYPE	$\frac{1}{4} \lambda$ antenna for portable equipment
FREQUENCY	2 m band covered by two models
IMPEDANCE	Nom. 50 Ω
POLARIZATION	Vertical
GAIN	0 dB (equal to a $\frac{1}{4} \lambda$ portable antenna)
BANDWIDTH	≥ 20 MHz @ SWR ≤ 2.5
SWR	< 2 when mounted directly on portable equipment
MAX. POWER	200 W
MECHANICAL	
MATERIALS	Stainless steel band and rubber Black-chromed brass
COLOUR	Black
TOTAL HEIGHT	500 mm (dep. on type)
WEIGHT	Approx. 45 g
CONNECTOR	FME (female) (Exchangeable BFME-connectors to be ordered separately)

RECOMMENDED BFME-CONNECTORS

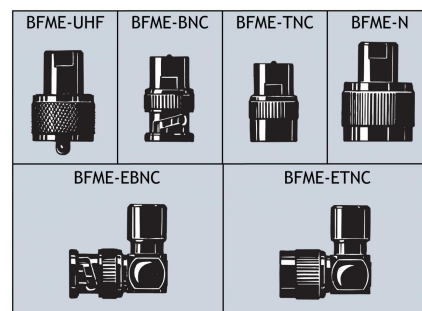

(To be ordered separately)

PLEASE NOTE

The SB 2 is also available with SMA male connector and different thread studs, but in this case with fixed, non-exchangeable connector (not FMEconnection system). Information on these special versions on request.



PROCOM France S.A.R.L. se réserve le droit d'améliorer les spécifications sans préavis.

16/05/12