


CA-TETRA-...

Disguised Antenna for TETRA Band

DESCRIPTION

- Highly flexible, polyethylene covered coaxantenna.
- $\frac{1}{2} \lambda$ skirt dipole antenna.
- Disguised body antenna.
- Especially designed for building-in in coat collars or the like.
- No irritating antenna which can hamper freedom of movement.
- Highest quality materials in an elegant design.

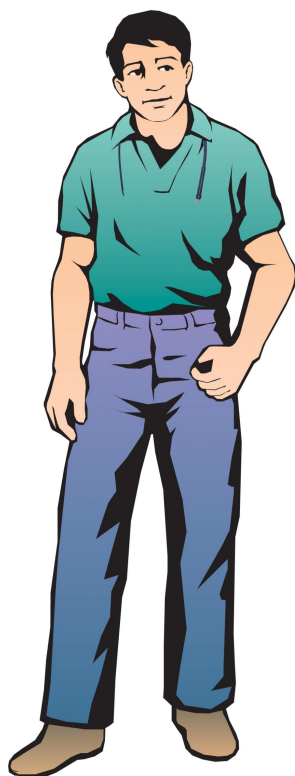


ORDERING DESIGNATIONS

TYPE	PRODUCT NO.
CA-TETRA-FSMA	140000498
CA-TETRA-MSMA	140000518

SPECIFICATIONS

ELECTRICAL	
MODEL	CA-TETRA-...
ANTENNA TYPE	$\frac{1}{2} \lambda$ antenna
FREQUENCY	380 - 430 MHz
IMPEDANCE	Nom. 50 Ω
POLARIZATION	Vertical
GAIN	5 dB (equal to a $\frac{1}{4} \lambda$ portable antenna)
BANDWIDTH	≥ 50 MHz @ SWR ≤ 2.5
SWR	< 2.5 when mounted in coat collar
MAX. POWER	25 W
MECHANICAL	
MATERIALS	Polyethylene covered coax cable Cu-nite brass
COLOUR	Black
TOTAL HEIGHT	Approx. 470 mm
WEIGHT	Approx. 25 g
CONNECTOR	SMA (female or male)

TYPICAL SWR CURVE

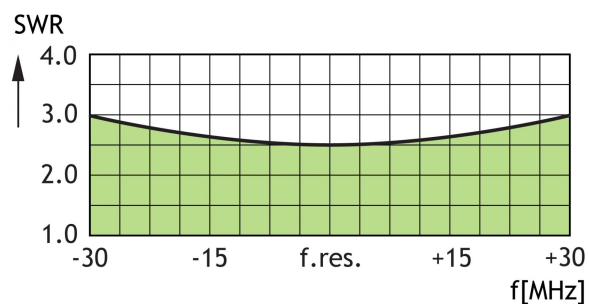

PROCOM France S.A.R.L. se réserve le droit d'améliorer les spécifications sans préavis.
21/12/12